

Baoding Guokun Machinery Co., Ltd

Grooved Eccentric Reducer



Grooved Eccentric Reducer details:

Name	Grooved Eccentric Reducer
HS Code	7307110000
Size	1"-12" or DN25-DN300
Material	Ductile Iron/ Cast Iron ASTM A536, Grade 65-45-12 with Elongation 12% Min
Finish	Epoxy/ painted Red, Blue, Orange, White
Pressure	300-1000 PSI
Connection	Grooved End, Thread End
Application	1. Fire fighting & fire sprinkler system for commercial and civil fire protection construction, such as water supplying, gas supplying, air-conditioning, etc 2. Industrial pipeline system in shipping, mine, oil field, cement, mine piping, chemical plant, etc Ordinary piping delivery in sewage treatment, subway station, airport, seaport, bridge, etc
Packaging	Cartons with pallet or wooden case 
Others	Grooved flange adapter, grooved pipe fittings, grooved elbow, grooved coupling, grooved tee, Tee, Elbow, Cross, Reducer, End cap, various valve, etc
Advantage	1. Automatic Vertical Production Line/ DISA Line 2. Painting in our factory 3. Automatic mold with high class tolerance and better finish 4. Testing the leakage or pressure per your orders More than 15 years casting experience and 7 years trading experience


Size Specification:

Web: www.guokuncasting.com

Email: gina@guokuncasting.com

Mobile: +86-18132789710

Baoding Guokun Machinery Co., Ltd

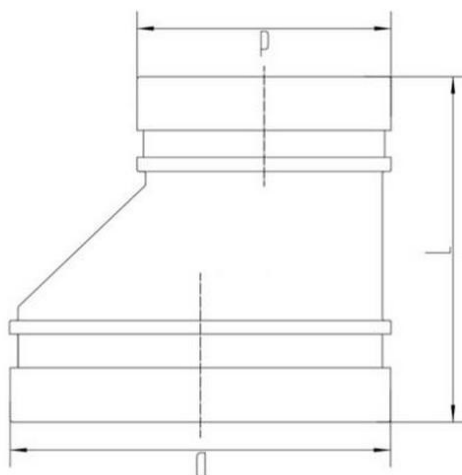

Size (DN/In)	Pipe O.D (mm/in)	L(mm/in)	
		Grooved Reducer	Threaded Reducer
25	33.7	64	64
1	1.327	2.52	2.52
32	42.4	64	64
1 1/4	1.669	2.52	2.52
40	48.3	64	64
1 1/2	1.900	2.52	2.52
50	60.3	64	64
2	2.375	2.52	2.52
65	73.0	64	64
2 1/2	2.875	2.52	2.52
65	76.1	64	64
3	3.000	2.52	2.52
80	88.9	64	64
3	3.500	2.52	2.52
100	114.3	76	76
4	4.500	2.99	2.99
125	139.7	89	89
5.5	5.500	3.504	3.504
150	165.1	102	102
6.5	6.500	4.016	4.016
150	168.3	102	102
6	6.625	4.016	4.016
200	219.1	127	127
8	8.625	5	5
200	273.0	152	152
50	10.750	5.984	5.984
300	323.9	178	178
12	12.750	7	7

Baoding Guokun Machinery Co., Ltd

Photos



Web: www.guokuncasting.com

Email: gina@guokuncasting.com

Mobile: +86-18132789710