


Grooved Fittings


Grooved coupling or pipe clamps

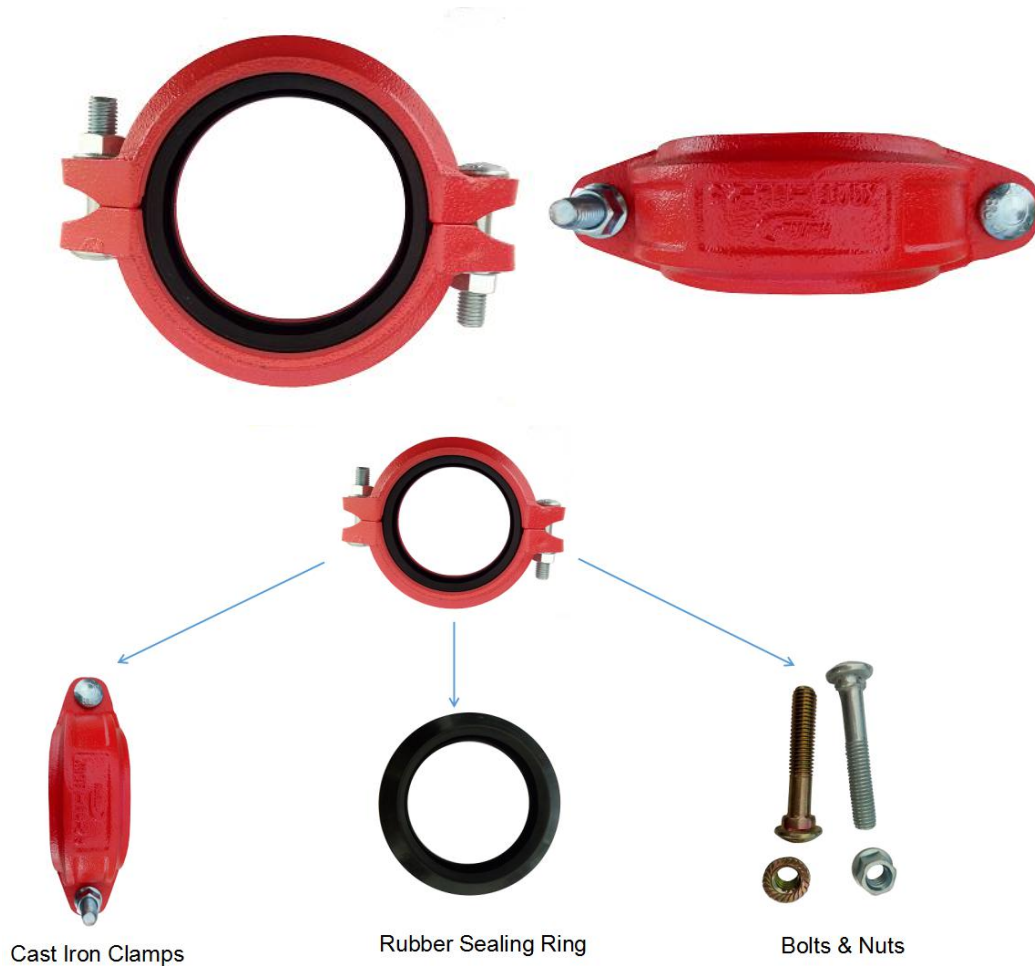

Product details:

Name	Grooved coupling or pipe clamps
HS Code	730711 or 730799
Material	Ductile iron, ASTM A536 Gr. 65-45-12 or QT450-10
Size	1"-12", DN25-DN300
Finish	Painting, Red or Blue
Standard	GB5135.11-2006 Automatic Sprinkler System- Part 11 Grooved pipe fittings And we will do the beating experiments to check the elongation of the last coupling per each lot. As per experience and many experiments, the last one is the worst performance of elongation. Please check the followings result, only

Baoding Guokun Machinery Co., Ltd

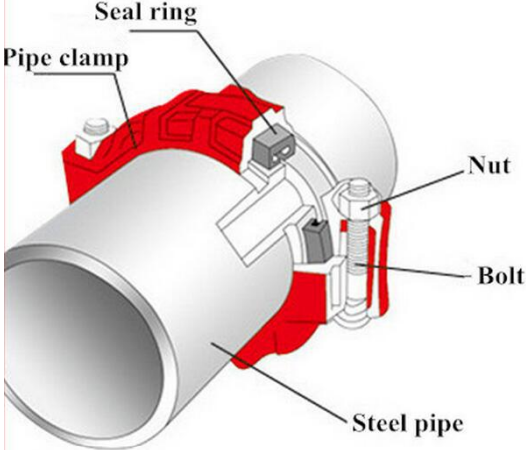	out of shape by beating, no break. 
Usage	1)Automatic sprinkler system for fire protection on commercial, civil and municipal constructions like water supplying, gas supplying, heat supplying, etc 2)Industrial pipeline system on shipping, mine, oil field, textile, powder plant, etc 3)Pipeline system on subway station, railway station, airport, seaport, bridge, etc 
Bolts & Nuts	Colorful Zn Plating; Bolts: Mechanical performance grade 8.8 Heavy Duty Nuts: Mechanical performance grade 8.8
Packing	Plywood case, wooden cases, pallet, or as per your requirements  1.Packed into the carbon box with your logo or our logo. Sometimes, we will wrap the coupling with bubble bag each.

Baoding Guokun Machinery Co., Ltd

		2. Put them into the wooden case or plywood case.
		

Size specification:

公称直径 Nominal Diameter (mm)	钢管外径 Outside Diameter (mm)	公称压力 Nominal Pressure (MPa)	螺栓尺寸 Bolt & Nut	最大外形尺寸 Maximum External Dimensions		
				DIA	L	H
25	33	2.5	2-M10×50	60	108	44
32	42		2-M10×50	70	112	
40	48		2-M10×50	76	118	47
50	57		2-M10×55	92	124	
50	60		2-M10×55	92	124	
65	76		2-M10×65	110	140	
80	89		2-M10×65	122	154	
90	102		2-M10×65	132	178	
100	108		2-M10×65	148	178	54
100	114		2-M12×75	154	186	
125	133		2-M12×75	173	220	
125	140		2-M12×75	180	216	
150	159		2-M12×75	200	238	
150	165		2-M12×75	205	244	
150	168		2-M16×90	210	250	66
200	219	1.6	2-M16×90	266	345	
250	273		2-M20×110	330	452	
300	325		2-M20×110	382	505	